

specifications

PG250HC-2




Gen2 Pegasus Horizontal 1/1
INTEGRAL, 2 Door, Fridge



CABINET DIMENSIONS

| | External | Internal |
|---------------------|--------------------|----------|
| Height | 716mm* | 570mm |
| Width | 1331mm | 833mm |
| Depth | 680mm | 545mm |
| Floor area | 0.90m ² | |
| Gross volume | 260L | |
| Net volume | 154L | |

* Height excludes castors, legs or optional worktop.

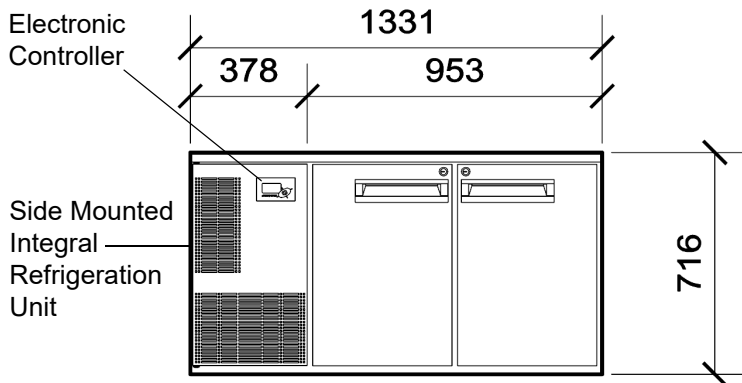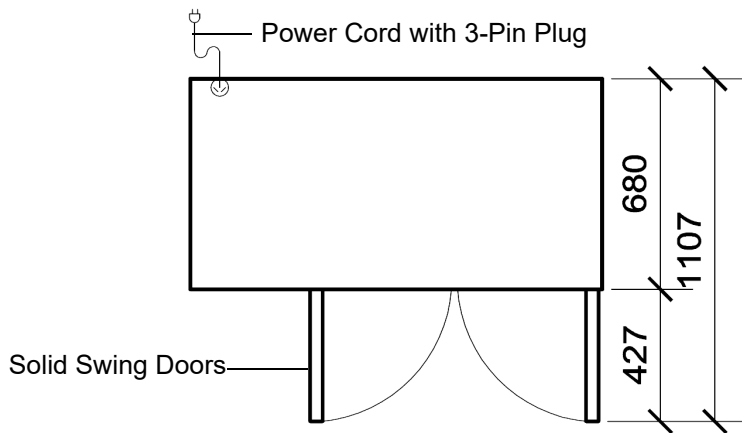

CABINET SPECIFICATIONS

| | |
|--|--|
| Doors | Solid stainless steel, self-closing doors (with key lock) - LH & RH hinged |
| Internal door opening size | 2 door openings: 570mm high x 365mm wide |
| Shelves | Two levels of non-tip, adjustable tray slides and/or shelves per door |
| Worktop (optional) | Optional 35mm stainless steel worktop with 65mm square edged fascia |
| Weight | 130 kg |
| Electrical safety climate class | 5 |
| Internal lighting | 1 x 5W T8 LED tube (Ø26 x 360mm) - Door activated |
| Electrical | 230-240 Volts a.c. 50 Hz, 2.46 Amps |
| Temperature range | +1°C to +4°C up to 40°C ambient |
| GEMS class | 5M1 |
| GEMS energy consumption | 4.51 kWh/24h |
| GEMS annual running cost | \$495 p.a. (@ \$0.30/kWh) |
| Refrigeration system | Electronic controlled, side mounted, integral refrigeration unit |
| Refrigerant | R134a / 450g |
| Nominal capacity | 447 Watts @ -10°C SST |
| Insulation | 60mm thick, high density cyclo-isopentane polyurethane foam |
| Drainage | No plumbing required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2008 SKOPE Industries Limited

PSS0177 Rev 3.1 Mar. 2021



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

